


Dismantling Joint DN40 to DN300 (PN10,16,25,40)

Specifications

Note: Maximum Longitudinal Adjustment
= Maximum Length – Minimum Length

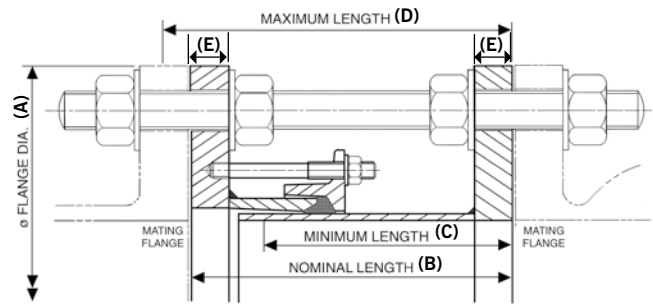

Dismantling Joint

Flange Details				Flange to Flange Details				Tie Rod Details					Flange Adaptor Method of Construction Cast / Fabricated	
Nom	Drilling	Flange Thickness		Flange OD	Nominal Length	Minimum Length	Maximum Length	Steel Tie Rod			Stainless Steel Tie Rod			
		Flange Adaptor E (mm)	Spigot E (mm)	A (mm)	B (mm)	C (mm)	D (mm)	Dia x Length (mm)	No.	Total Weight of DJ (kg)	Dia x Length (mm)	No.	Total Weight of DJ (kg)	
40	PN10,16,25,40	18	18	150	187	167	207	M16 x 300	4	7.8	M16 x 300	4	7.8	Fabricated
50	PN10,16,25,40	17	18	165	194	174	214	M16 x 300	4	8.2	M16 x 300	4	8.2	Cast
65	PN10,16	17	18	185	194	174	214	M16 x 300	4	9.4	M16 x 300	4	9.3	Cast
80	PN10,16,25,40	17	18	200	194	174	214	M16 x 300	4	10.4	M16 x 300	4	10.4	Cast
100	PN10,16	17	18	220	194	174	214	M16 x 300	4	11.6	M16 x 300	4	11.6	Cast
100	PN25,40	25	25	235	194	174	214	M20 x 320	4	19.2	M20 x 320	4	19.2	Fabricated
125	PN10,16	17	18	250	194	174	214	M16 x 300	4	13.5	M16 x 300	4	13.5	Cast
125	PN25,40	25	25	270	194	174	214	M24 x 330	4	26.2	M24 x 330	4	26.2	Fabricated
150	PN10,16	17	18	285	194	174	214	M20 x 310	4	17.7	M20 x 310	4	17.7	Cast
150	PN25	25	25	300	194	174	214	M24 x 330	4	28.9	M24 x 330	4	28.9	Fabricated
150	PN40	25	25	300	194	174	214	M24 x 330	4	28.8	M24 x 330	4	28.8	Fabricated
200	PN10	20	18	340	194	174	214	M20 x 310	4	24.3	M20 x 310	4	24.3	Cast
200	PN16	20	18	340	194	174	214	M20 x 310	4	24.1	M20 x 310	4	24.1	Cast
200	PN25	25	25	360	194	174	214	M24 x 340	4	37.5	M24 x 340	4	37.5	Fabricated
200	PN40	25	25	375	194	174	214	M27 x 350	4	42.6	M27 x 350	4	42.6	Fabricated
250	PN10	19	18	395	194	174	214	M20 x 310	4	29.6	M20 x 310	4	29.6	Cast
250	PN16	19	18	405	194	174	214	M24 x 330	4	32.8	M24 x 330	4	32.8	Cast
250	PN25	25	25	425	194	174	214	M27 x 350	4	49.1	M27 x 350	4	49.1	Fabricated
250	PN40	25	25	450	194	174	214	M30 x 370	4	57.9	M30 x 370	4	57.9	Fabricated
300	PN10	19	18	445	194	174	214	M20 x 310	4	36.2	M20 x 310	4	36.2	Cast
300	PN16	19	18	460	194	174	214	M24 x 330	4	40.0	M24 x 330	4	40.0	Cast
300	PN25	25	25	485	194	174	214	M27 x 350	4	57.1	M27 x 350	4	57.1	Fabricated
300	PN40	25	25	515	194	174	214	M30 x 380	4	69.8	M30 x 380	4	69.8	Fabricated

Materials & Relevant Standards

Flange Drilling

BS EN1092-1 (formerly BS4504), ISO7005

Cast Flange Adaptor

Body - Ductile Iron to BS EN1563:

Symbol EN-GJS-450-10

End Rings - Ductile Iron to BS EN1563:

Symbol EN-GJS-450-10

Fabricated Flange Adaptor

Body - Rolled Steel to BS EN 10025-2:

Grade S275

End Rings - Rolled Steel to BS EN 10025-2:

Grade S275

Sleeve - Steel Tube to BS EN10255:

or Steel Tube to BS EN10216-1: Grade

P265TR1 or Rolled Steel to BS EN 10025-2:

Grade S275

Flanged Spigot

Flange - Rolled Steel to BS EN 10025-2:

Grade S275

Spigot - Steel Tube to BS EN10255:

or Steel Tube to BS EN10216-1: Grade

P265TR1 or Rolled Steel to BS EN 10025-2:

Grade S275

Gaskets

BS EN681-1: Type WA WRAS listed

Steel Tie Rods & Nuts

Tie Rods - BS EN10269: +A1: Name 42CrMo4

(Yield 725N/mm²) (formerly MB7)

Nuts - BS EN20898-2: Property Class 8.0

Stainless Steel Tie Rods & Nuts

Tie Rods - Stainless Steel to BS EN3506-1:

Grade A2/A4 Property Class 70

(Yield 450N/mm²)

Nuts 4 per Tie Rod - Stainless Steel to BS

EN3506-2: Grade A2/A4 Property Class 80

Studs/Nuts/Washers

Studs - Steel to BS EN ISO898-1:

Property Class 4.8

Nuts - Steel to BS4190: Grade 4

Washers - Stainless Steel to BS1449:Part 2:

Grade 304S15

Coatings (Others available on request)

Flange Adaptor - Rilsan Nylon 11

Flanged Spigot - Rilsan Nylon 11

End Ring - Rilsan Nylon 11

Studs/Nuts - Sheraplex to WIS 4-52-03

Steel Tie Rods/Nuts - Zn3 Zinc coated

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. Crane Ltd assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.